


MM LT, MT, G5 Datasheet



Noncontact Temperature Measurement for Industrial Applications

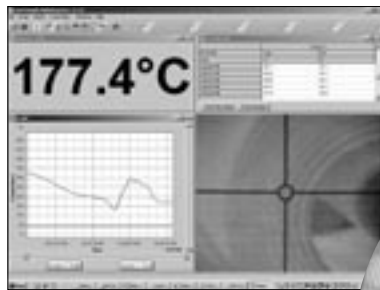

The Marathon™ Series MM

- High resolution 70:1 optics
- Real time ambient background temperature compensation
- Easy to use operator interface
- Optical and laser or video sighting
- Rugged stainless steel housing
- Simultaneous analog and digital outputs
- Field Calibration Software
- Windows® DataTemp Multidrop software for data acquisition, display and analysis

Marathon™ MM infrared thermometers provide superior accuracy in demanding industrial process applications. The MM features an advanced electro-optical design, digital electronics and an intuitive easy to use push button interface—all combined in a rugged, compact stainless steel housing. The sensor can be easily set up for stand alone operation or configured for a multi sensor network. All Marathon MM Series sensors feature both through-the-lens optical sighting and laser sighting for optimum sensor alignment and set-up. The MM is also available with optional video sighting.

All Marathon Series thermometers include bi-directional, RS-485 serial communications between the sensor (or a local area network of sensors) on the factory floor and a personal computer in the control room. This enables remote setup, monitoring, calibration, and maintenance, especially valuable for installation in hard-to-reach locations.

Highlights:

- High resolution optics
- Rugged stainless steel housing
- Real time ambient background temperature compensation
- 3 different spectral responses to meet every demanding application
- Laser sighting in addition to through the lens optical sighting
- Optional color video sighting
- Measures from -40°C to 2250°C (-40°F to 4532°F) depending on model
- Capture transient events as fast as 20 ms
- Simultaneous analog and digital outputs
- Programmable relay output dual-temperature setpoints or “fail-safe”
- Bi-directional RS485 communications
- Supports up to 32 Marathon Series sensors on a multipoint network
- Windows® DataTemp Multidrop Software (NT4, Windows 2000, XP compatible)
- Field Calibration Software

Specifications

Model	Temperature Ranges	Spectral Response	Response Time (95% response)
LTS	-40°C to 800°C (-40°F to 1472°F)	8 - 14 µm	120 ms
G5L	250°C to 1650°C (482°F to 3002°F)	5 µm	60 ms
G5H	450°C to 2250°C (842°F to 4082°F)	5 µm	60 ms
MTS	250°C to 1100°C (482°F to 2012°F)	3.9 µm	120 ms
Accuracy ⁽¹⁾	±1% of reading for T _{meas} > 100°C, 1°C for T _{meas} < 100°C		
Repeatability	±0.5% of reading or ±0.5°C, whichever is greater		
Optics ⁽²⁾	70:1		
Temperature Resolution	0.1° K on 4 – 20 mA output		
Emissivity	0.100 to 1.150, in 0.001 increments		
Signal Processing	Peak hold, valley hold, averaging, ambient background temperature compensation		

(1) Accuracy @ Ambient 23°C ± 5°C (73°F ± 9°F)

(2) Measured @ focal distance


Electrical Specifications

Power Supply	24 VDC ± 20%, 500 mA
Outputs	
Analog	0 - 20 mA, 4 - 20 mA, 14 bit resolution, max. current loop impedance: 500 ohms.
Digital RS-485	Networkable to 32 sensors, Baud rate: 300, 1200, 2400, 9600, 19200, 38400, 57600 (default), 115200. Data format: 8 bit, no parity, 1 stop bit, 4-wire mode (full-duplex) or 2-wire mode (half duplex), selectable via control panel or software, 2-wire: max. 57600 Baud
Relay	Contacts max. 48 V, 300 mA, response time < 2 ms, (software programmable)
Display	5 digit backlit LCD display
External Input	
Input Voltage	0 to 5 VDC functions: trigger, ambient background temperature compensation, or emissivity setting

Environmental Specifications


Environmental rating	NEMA-4 (IEC 529, IP 65)
EMI	CE compliant to IEC 61326, performance criteria B
Relative Humidity	10% to 95% non-condensing
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Ambient Temperature	0°C to 65°C without cooling, includes video option (32°F to 150°F)
with air cooling	10°C to 120°C (50°F to 250°F)
with water cooling	10°C to 175°C (50°F to 350°F)
with Thermo jacket	water cooled 10°C to 315°C (50°F to 600°F)
Vibration	MIL-STD-810D (IEC 68-2-6) 3G's, 11 - 200 Hz, any axis
Mechanical Shock	MIL-STD-810D (IEC 68-2-27) 50G's, 11 ms duration, any axis
Weight	0.7 kg (8.7 oz)

Easy to Use Interface

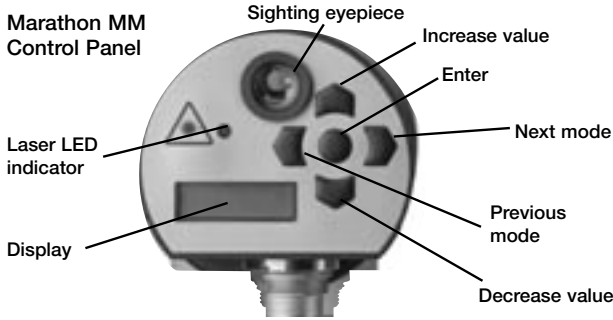


Physical Dimensions

MM Housing

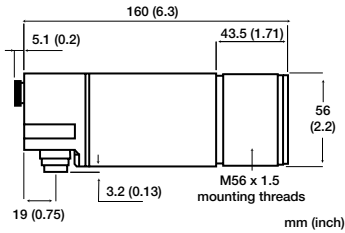

MM with Air/Water Cooled Housing

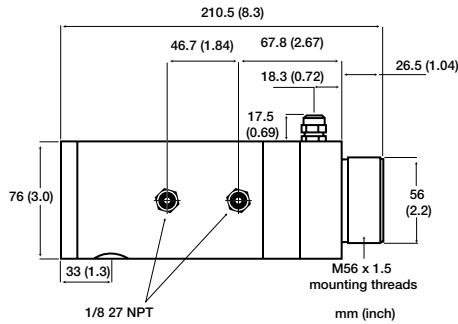

Accessories

- Air purge collar (XXXMMACAP) *
- Swivel bracket (XXXTXACSB) *
- Adjustable bracket (XXXMMACAB)
- Right angle mirror (XXXMMACRA)
- Pipe adapter (Compatible with Sighting Tubes) (XXXMMACPA) *
- Adjustable Pipe Adapter Assembly (Compatible with Sighting Tubes) (XXXTXAPA) *

*Compatible with standard unit and "W" option (not ThermoJacket)

Flow Regulators

- Water flow regulator (water cooling) (XXXTXWR)
- Air purging flow/regulator assembly with air filter (XXXTXAR)
- Cooling air flow regulator (high capacity) (XXXTXCAFR)

ThermoJacket Housing Rated to 315 °C (600 °F)


- ThermoJacket housing; for Marathon MM (RAYTXJ4)
- Mounting Flange for ThermoJacket (XXXTXMF)**
- Adjustable mounting base (XXXTXMB)**
- Adjustable Pipe Adapter assembly (XXXTXAPA) **
- Mounting flange for use with sighting tubes (XXXTXMST)**

** For use with ThermoJacket only


Sighting Tubes

- 300mm (12 in.) SIGHTING TUBE, ceramic (up to 1500°C) (XXXTSTC12)
- 300mm (12 in.) SIGHTING TUBE stainless steel (up to 800°C) (XXXTST12)
- 300mm (12 in.) SIGHTING TUBE, carbon steel; 45 degree end-cut with slotted weep hole at base. (BEESIGHTT)
- Power Supply (24VDC, 110/220VAC input) and Marathon Terminal Block mounted in a NEMA 4 (IP65) enclosure (RAYMAPB)
- Power Supply 24VDC 1.1A Switching power supply with universal input (110/220V) (XXX2CDCPSS)
- Spare Marathon Terminal Block Accessory (XXXMATB)
- Spare Marathon Terminal Block in a NEMA-4 enclosure (XXXMATBN4)
- RS485/RS232 CONVERTER
- DB25 connector to Terminal Strip Interface Converter, for direct wiring between a serial interface and the Marathon terminal block (XXX485CVT)


Nominal Optical Specifications

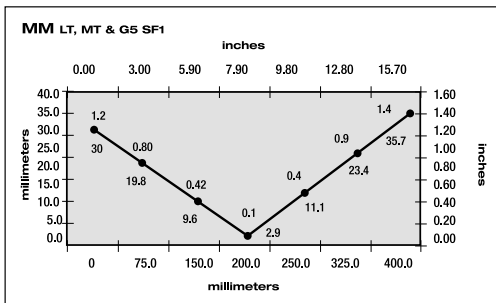


Standard Focus 1

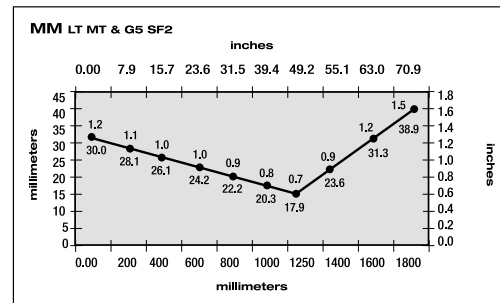

Standard Focus 2

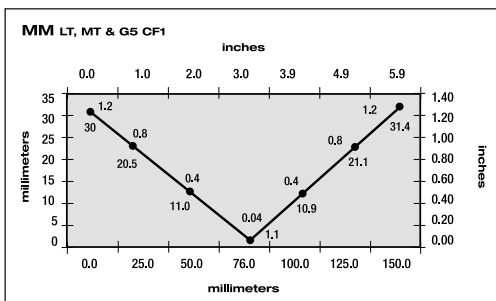


Close Focus 1

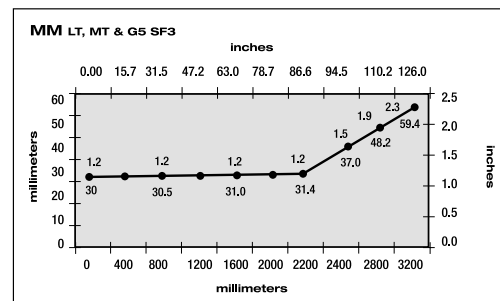

Standard Focus 3

LT, MT, and G5 D:S ratio measured at 90% energy. Other focus options available.

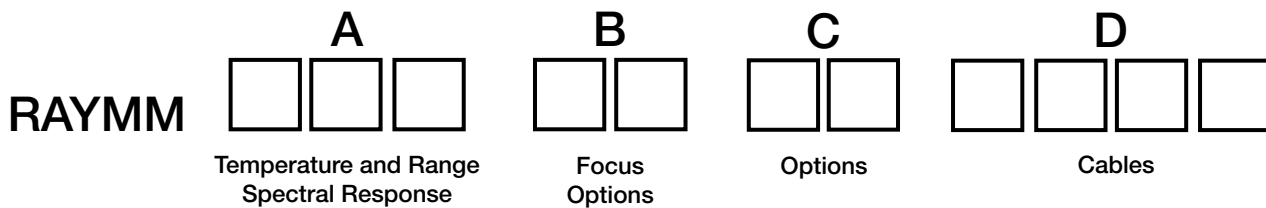

Model	Description
RAYMM	
Code A	Temperature Range
LTS	Low Temp: -40°C to 800°C (-40°F to 1472°F) / 8 to 14 microns, 120 mSec Response Time
MTS	Medium Temp: 200°C to 1400°C (392°F to 2552°F) / 3.9 microns, 120 mSec Response Time
G5L	Glass Surface: 250°C to 1650°C (482°F to 3002°F) / 5.0 microns, 60 mSec Response Time
G5H	Quartz Surface: 450°C to 2250°C (842°F to 4082°F), 60 mSec Response Time
Code B	Focus Option
SF 1	Standard Focus 1 Optics
SF 2	Standard Focus 2 Optics
SF 3	Standard Focus 3 Optics
CF 1	Close Focus Optics
Code C	Options must be specified at the time of order
L	Laser Sighting – Standard Model
V	Video sighting option (in addition to optical sighting) Note: Video sighting replaces the laser sighting feature
W	Coolable Housing, includes Lens Air Purge Collar Note: For ambient temperatures exceeding 175°C (350°F), See Thermo jacket
Typical Model Number	RAYMMLTSS3V Specifies a LT model with standard focus 3 optics, video sighting option.

Raytek Automation Products: Noncontact Temperature Measurement for Industrial ApplicationsSM

Raytek Corporation
 Worldwide Headquarters
 1201 Shaffer Rd. PO Box 1820
 Santa Cruz, CA 95061-1820 USA
 Tel: 1 800 227 8074
 1 831 458 1110
 Fax: 1 800 423 7711
 solutions@raytek.com

To find a Raytek office near you please visit www.raytek.com

Worldwide Service
 Raytek offers services including emergency repairs and calibration.
 For more information, contact your local office or e-mail: support@raytek.com



Raytek is an ISO 9001 certified company

www.raytek.com
 for up-to-the-minute features



Calle 16 Nro. 4924 - Berazategui (1884)
Buenos Aires - Argentina
 Tel/Fax 256-1946 / 0476